




PNGNH66-DGBX(210) 715-740 Watt

N-type BIFACIAL MODULE

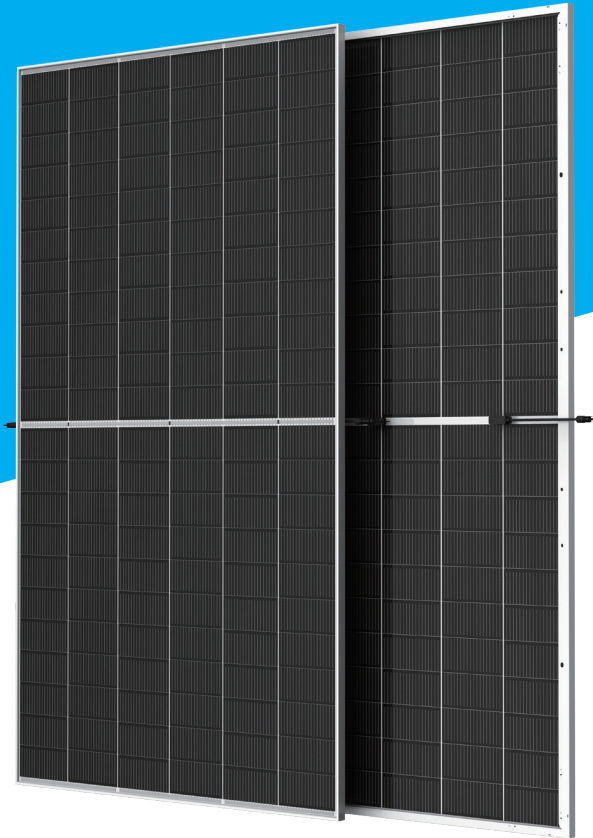

Key Features



Multi Busbar Solar Cell

Stronger current collection ability, Special circuit design with much lower hot spot temperature;



PID Resistant

Excellent PID resistance at 96 hours (85°C/85%) test, and also can be improved to meet higher standards for the particularly harsh environment;



Anti-Crack

Excellent anti-microcracking performance with more balanced interior stress;



Module efficiency up to 23.8%

Half cell structure brings low resistance characteristic, higher lifetime generating capacity, simultaneously lower annual power attenuation;



Low-Light Performance

Excellent power generation performance under Low-Light condition due to multi busbar; better shading response benefit from half cell module;




Strength and Durability

Certified for 5400Pa snow and 2400Pa Wind loads test;

Linear Performance Warranty

12 Years Product Warranty · 30 Years Linear Power Warranty

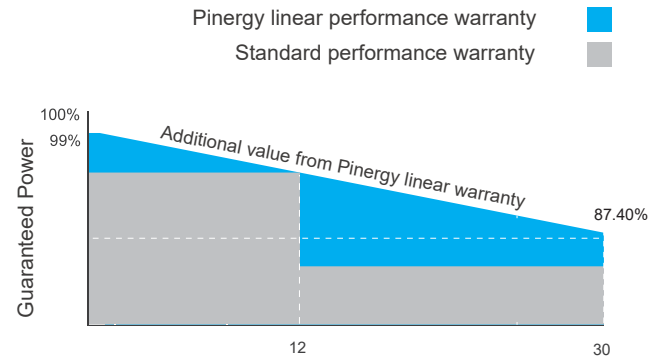

Certifications

- IEC 61215, IEC 61730, CE, CQC
- ISO9001: 2015: Quality management system
- ISO14001: 2015: Environmental management system
- ISO45001: 2018: Occupational health and safety management system



Electrical Specifications

Module Type: PNGNH66-DGBX-xxx , (xxx=Pmax)

Module Type	715		720		725		730		735		740	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Max. Power (Pmax/W)	715	547	720	551	725	555	730	559	735	563	740	566
Voltage at Max. Power (Vmp/V)	41.1	38.7	41.3	38.8	41.5	39.0	41.7	39.3	41.9	39.5	42.1	39.7
Current at Max. Power (Imp/A)	17.4	14.14	17.44	14.19	17.47	14.23	17.51	14.24	17.55	14.25	17.58	14.27
Open circuit voltage (Voc/V)	49.2	46.7	49.4	46.9	49.6	47.1	49.9	47.2	50.1	47.5	50.3	47.7
Short circuit current (Isc/A)	18.44	14.86	18.49	14.9	18.54	14.94	18.58	14.98	18.62	15.01	18.66	15.04
Module efficiency (%)	23.0%		23.2%		23.3%		23.5%		23.7%		23.8%	
Power Tolerance (W)	0~+5											

Standard Test Condition (STC): Irradiance 1000W/m², Cell Temperature 25°C, AM1.5

Nominal Module Operating Temperature (NOCT): Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s

Electrical Characteristics With Different Power Bin (Reference To 10% Irradiance Ratio)

Maximum Power-Pmp (W)	787	792	798	803	809	814
Maximum Power Voltage (Vmp/V)	41.1	41.3	41.5	41.7	41.9	42.1
Maximum Power Current (Imp/A)	19.14	19.18	19.22	19.26	19.31	19.34
Open Circuit Voltage (Voc/V)	49.2	49.4	49.6	49.9	50.1	50.3
Short Circuit Current (Isc/A)	20.28	20.34	20.39	20.44	20.48	20.53
Irradiance Ratio (Rear/Front)	10%					


Mechanical Specifications

Cell Type	N-type Mono TOPCon
No. of Cells	132 (6×22)
Dimension	2384x1303x33mm
Weight	38.3kg
Glass	Dual glass, 2.0mm coated tempered glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 diodes
Output Cables	4mm ² , Length 300mm or customized
Connector type	MC4 compatible

Packaging Configurations

Per Pallet	33 pcs
Per 40' HQ Container	594 pcs

Engineering Drawings

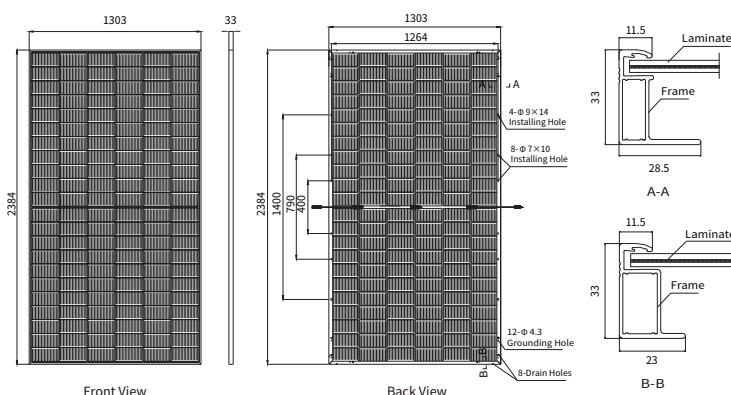

Temperature Characteristics

NOCT Temperature	44°C ±2°C
Temperature Coefficient (Pmax)	-0.36%/°C
Temperature Coefficient (Voc)	-0.28%/°C
Temperature Coefficient (Isc)	0.05%/°C

Maximum Ratings

Maximum system voltage (IEC)	1500V DC
Snow / Wind	5400Pa / 2400Pa
Operating Temperature	-40°C ~ +85°C
Maximum series fuse rating	35A

Curve & Temperature Dependence

